



FIG. 1

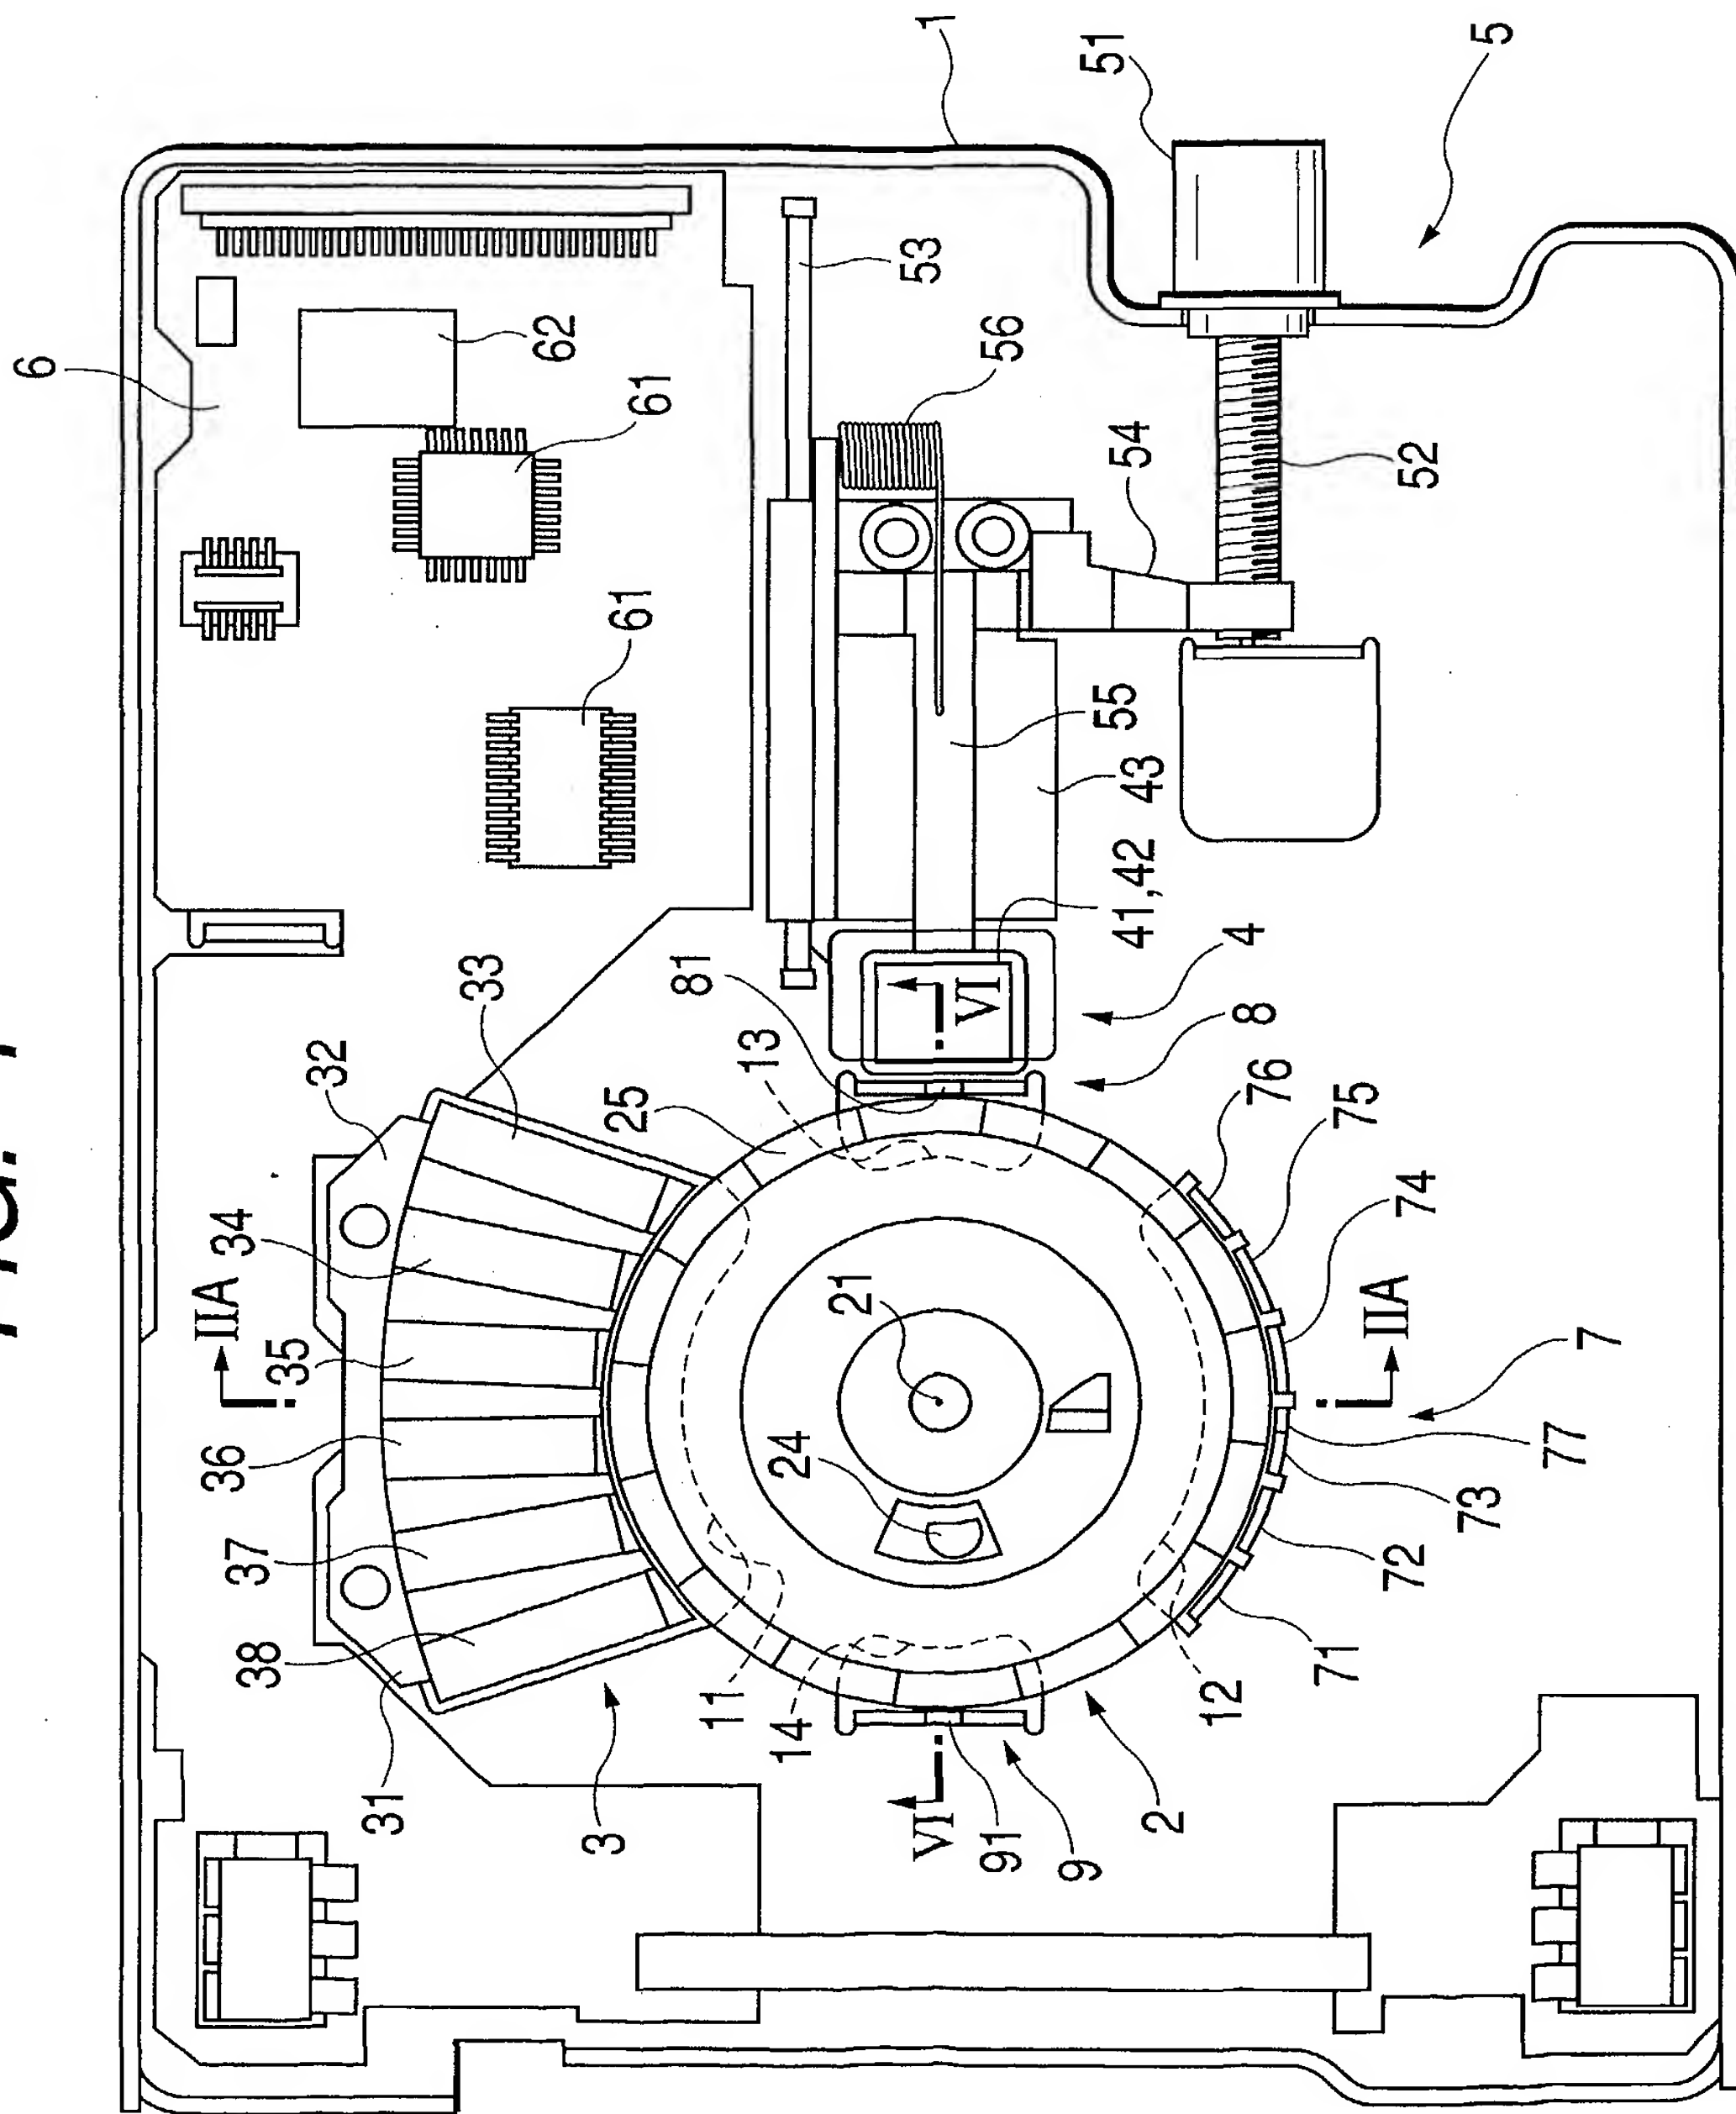




FIG. 2A



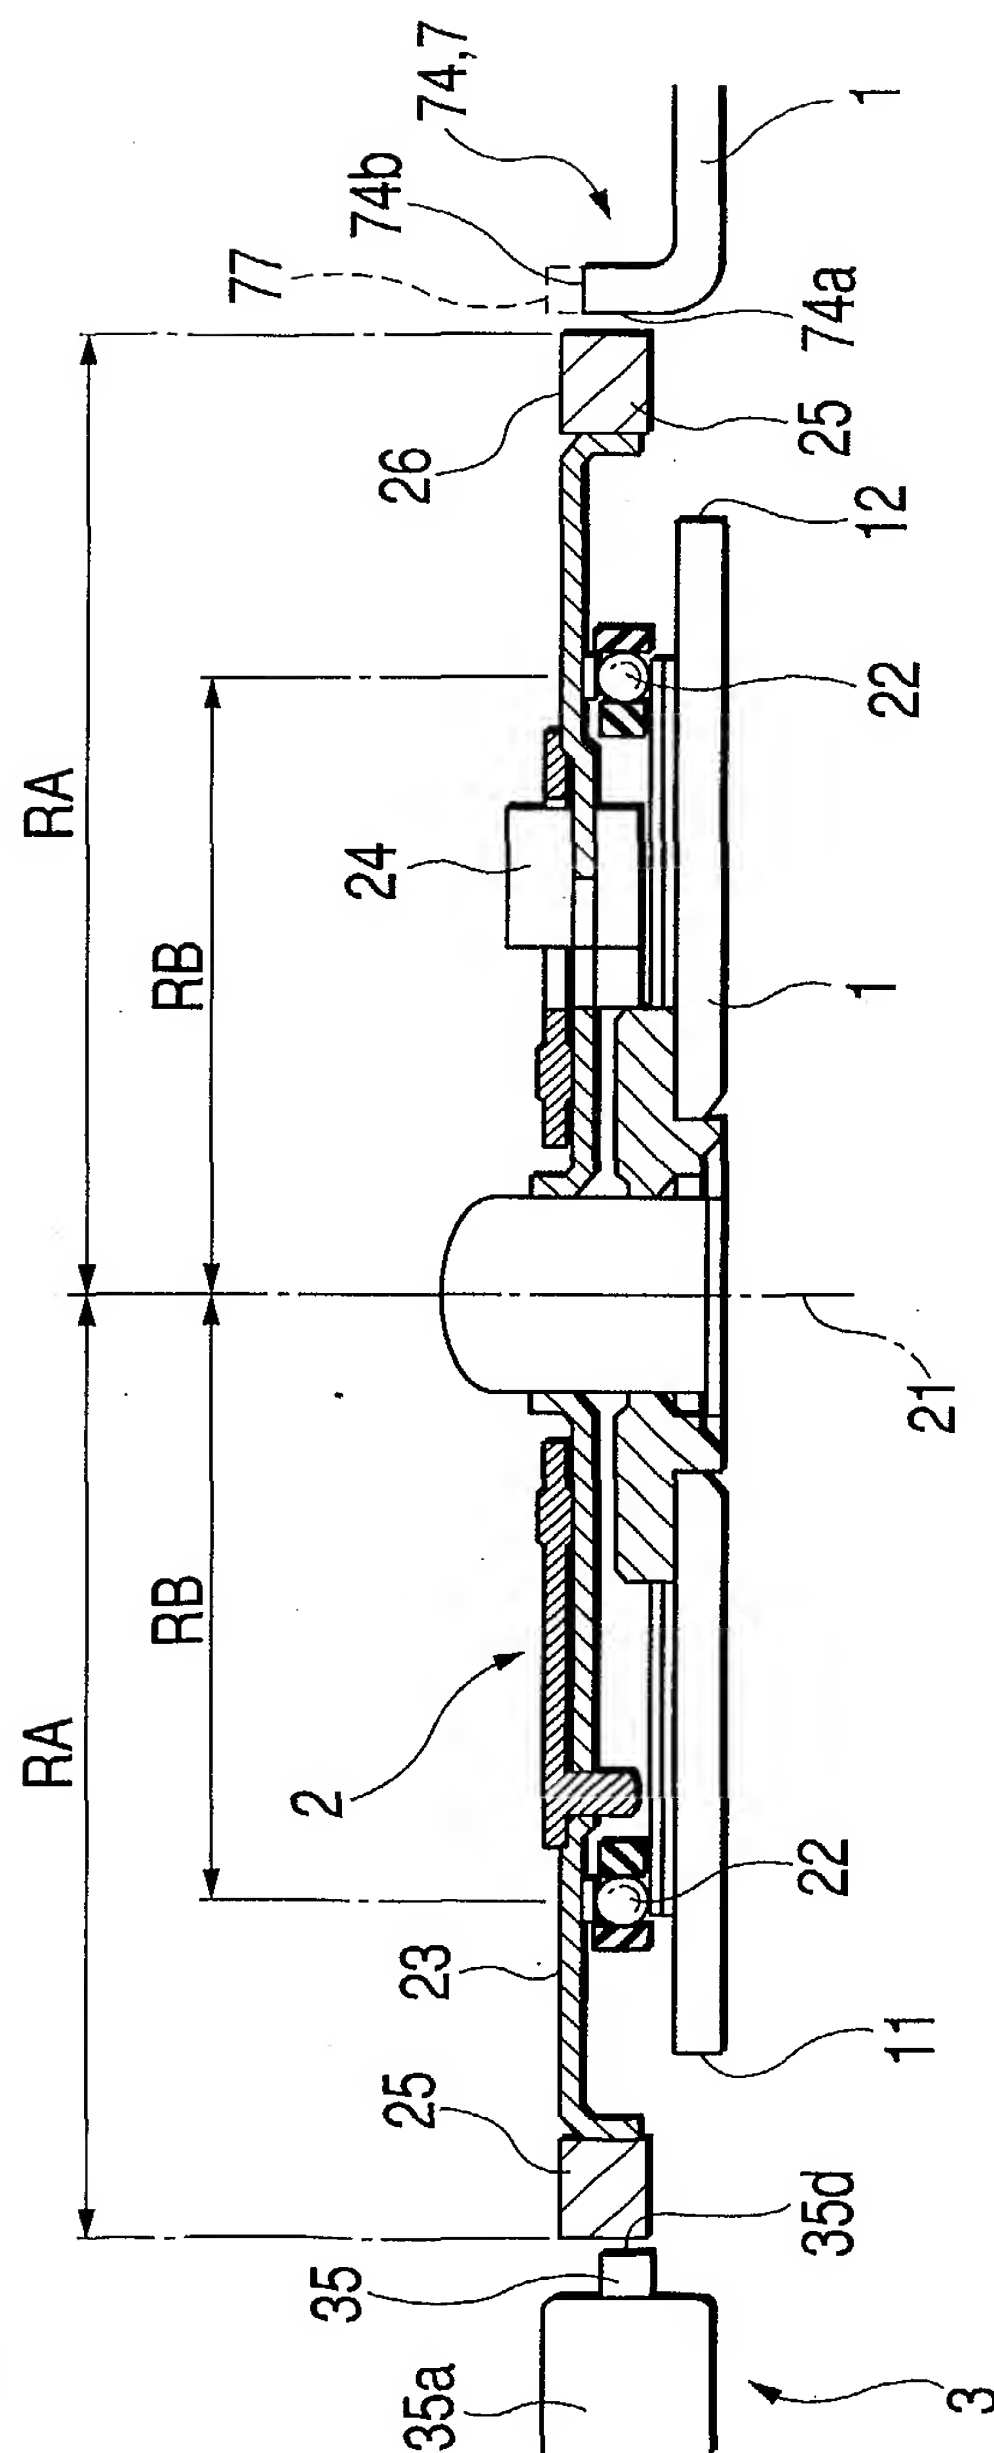


FIG. 2B



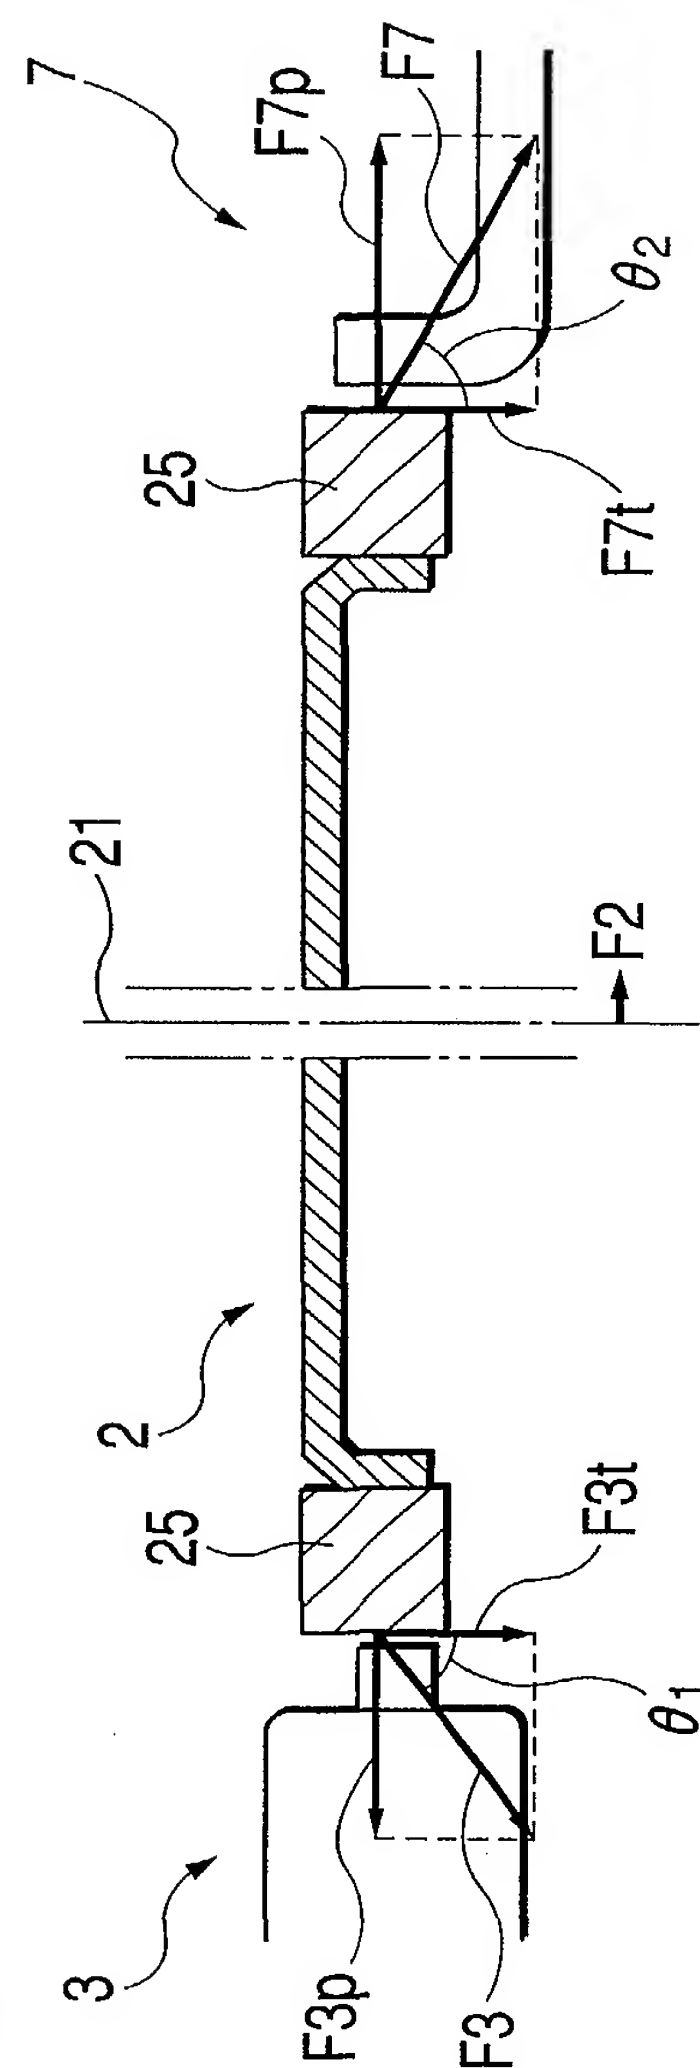

**FIG. 3**

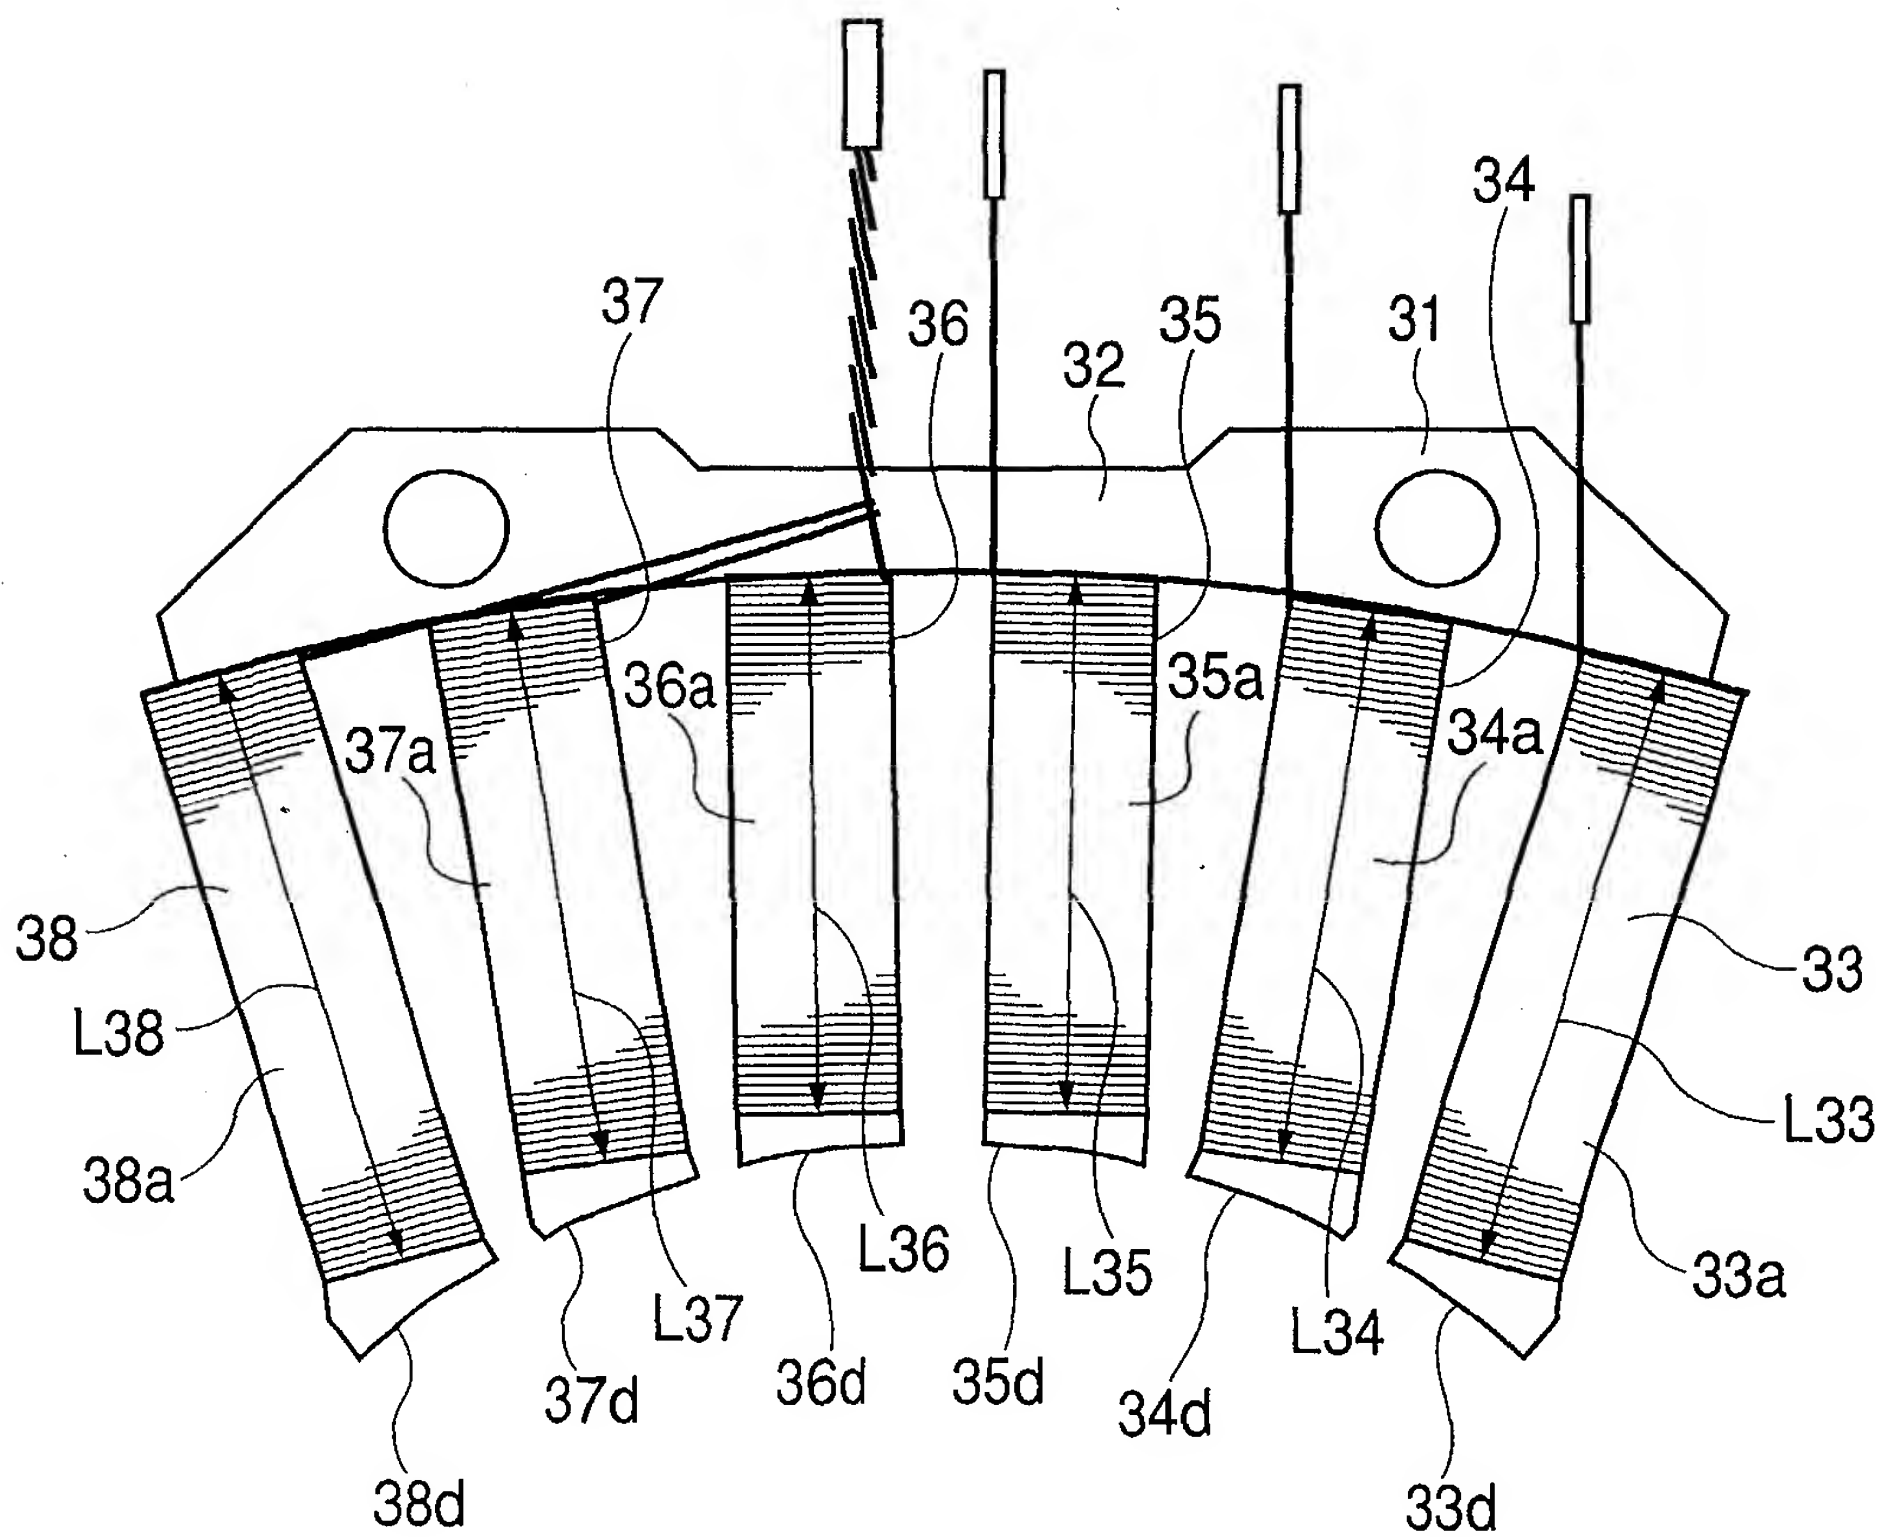


1007948-020702




4 / 10

**FIG. 4**

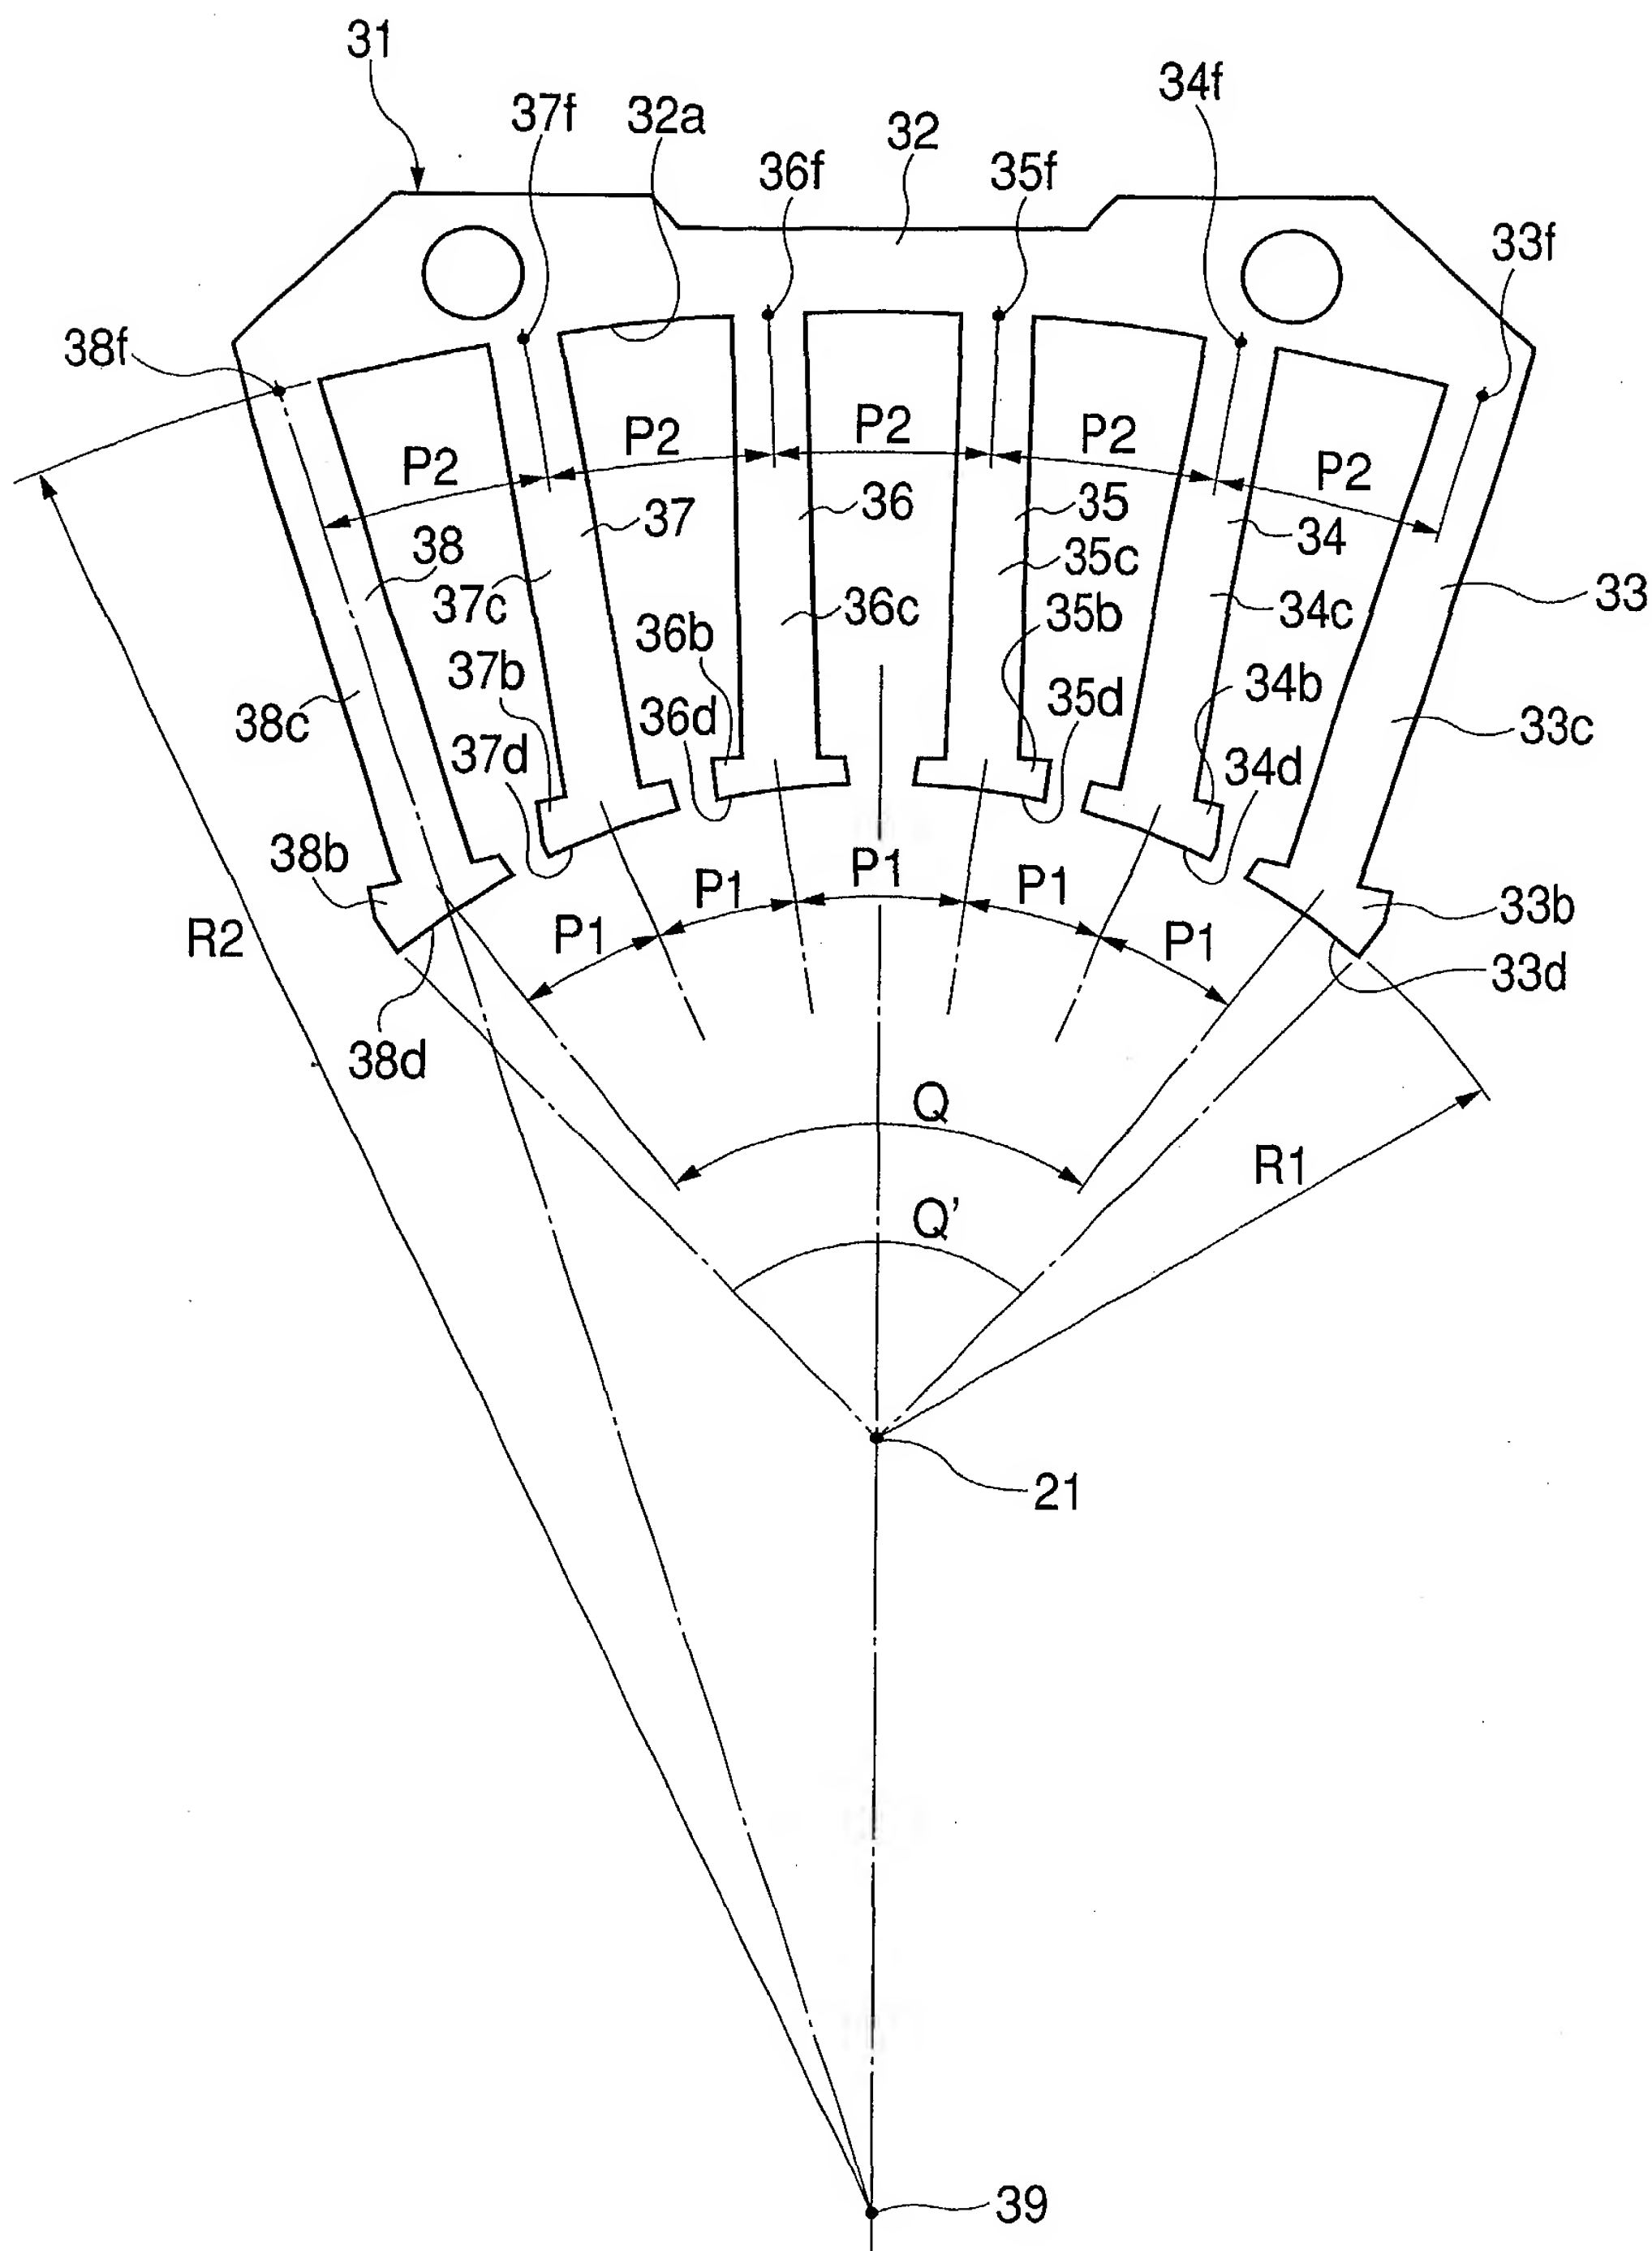


1007248-0200





5 / 10

**FIG. 5**

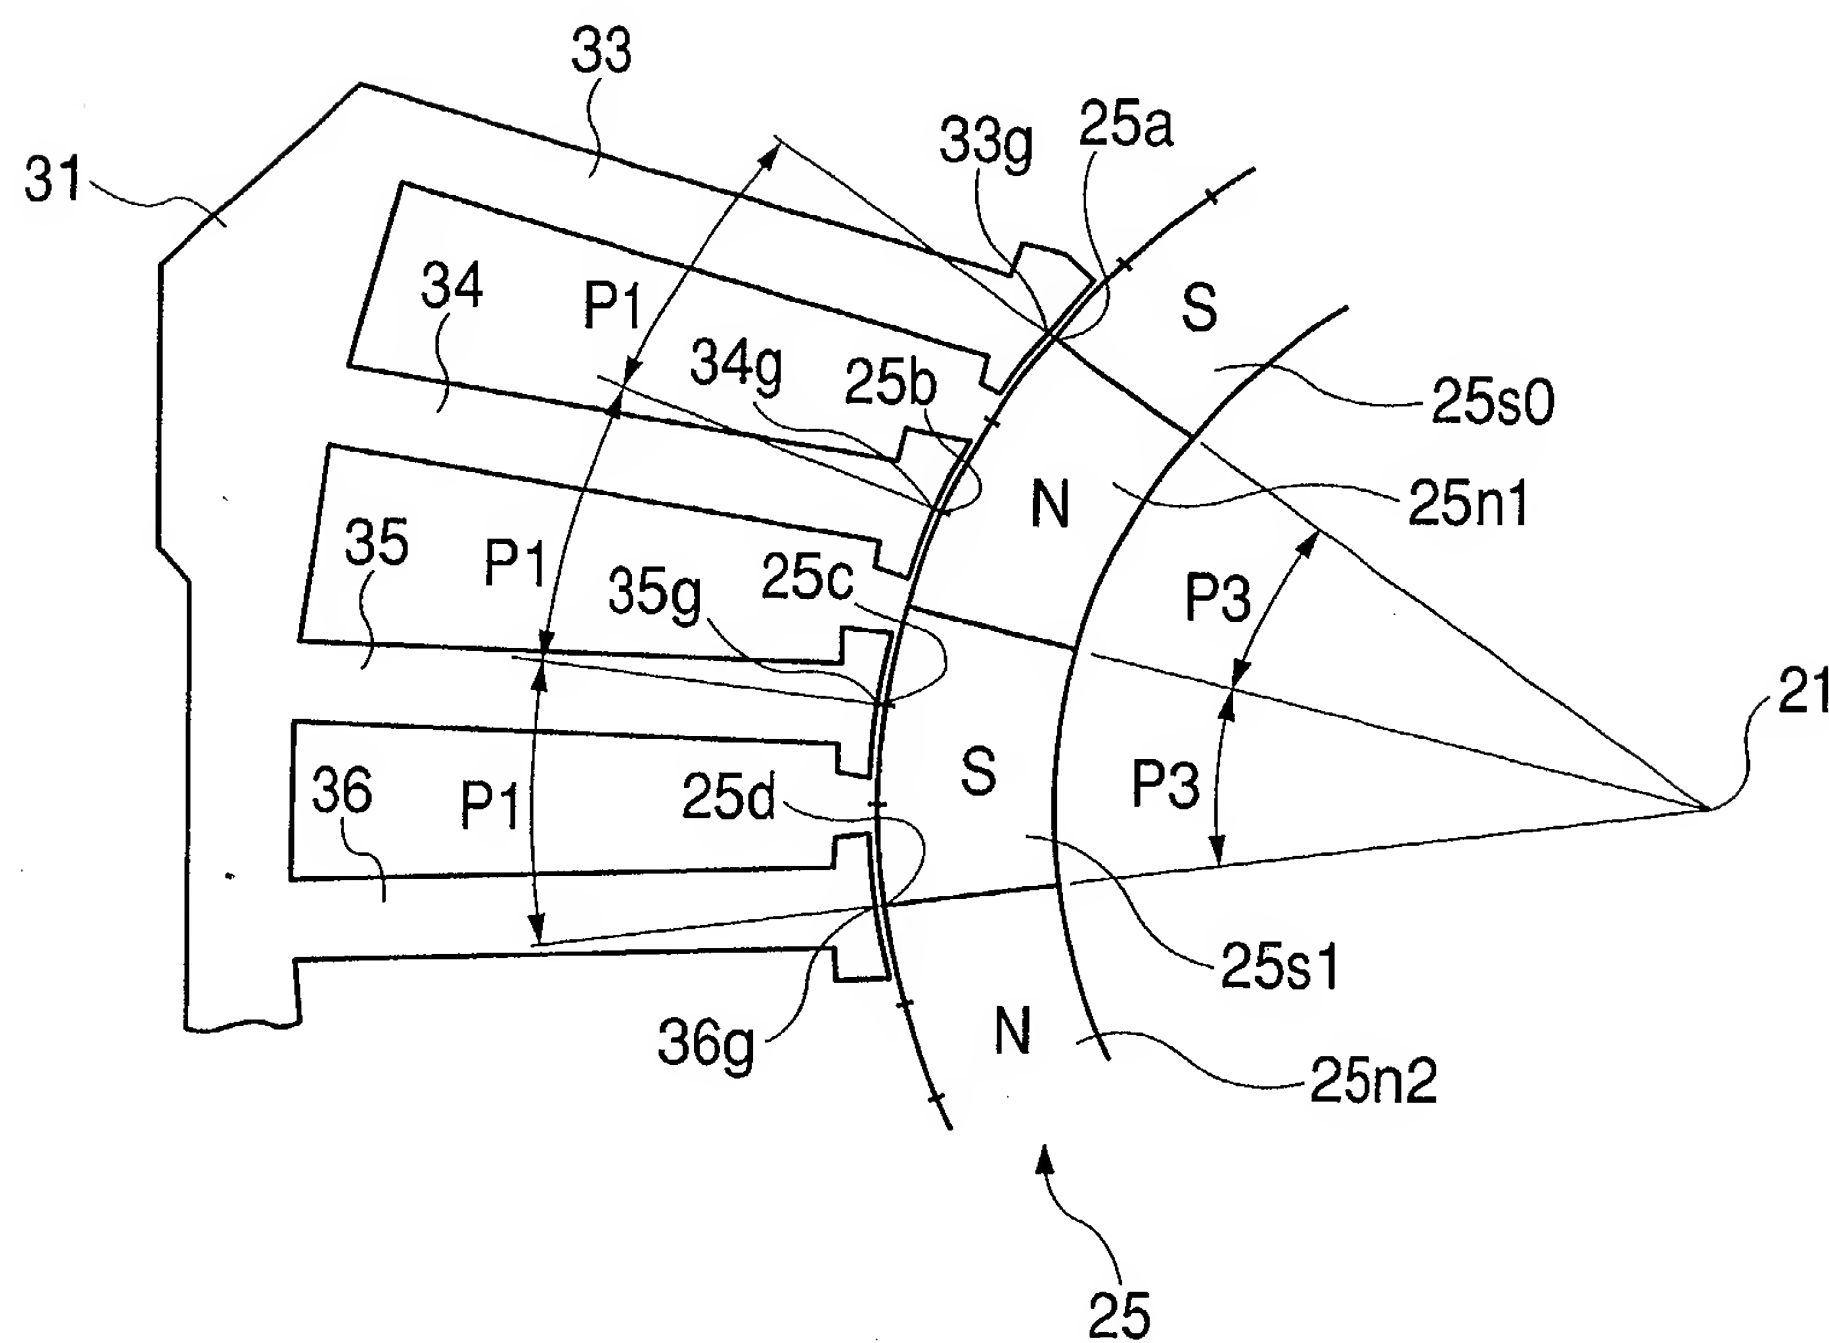


10072487 020702



6 / 10


FIG. 6

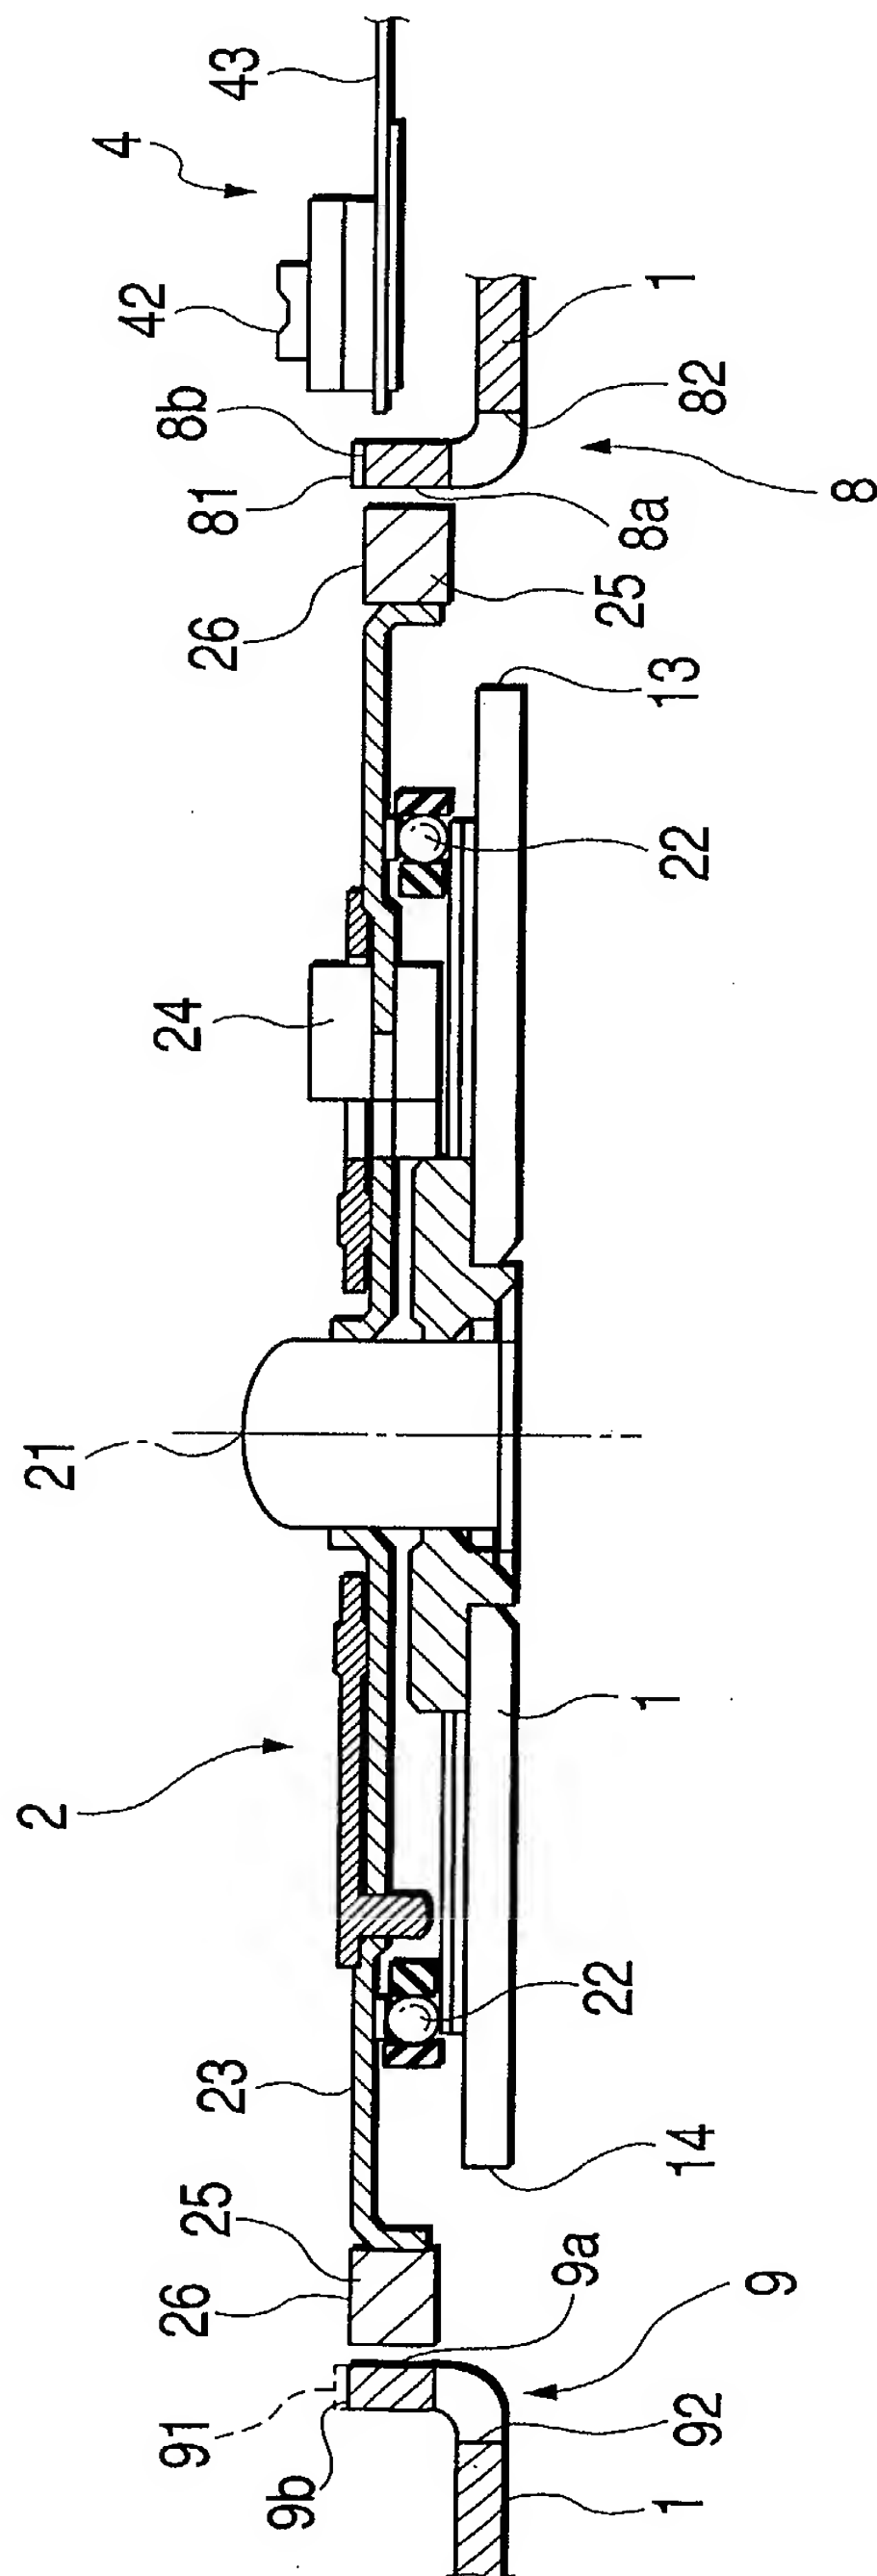



7 / 10


# FIG. 7 PRIOR ART

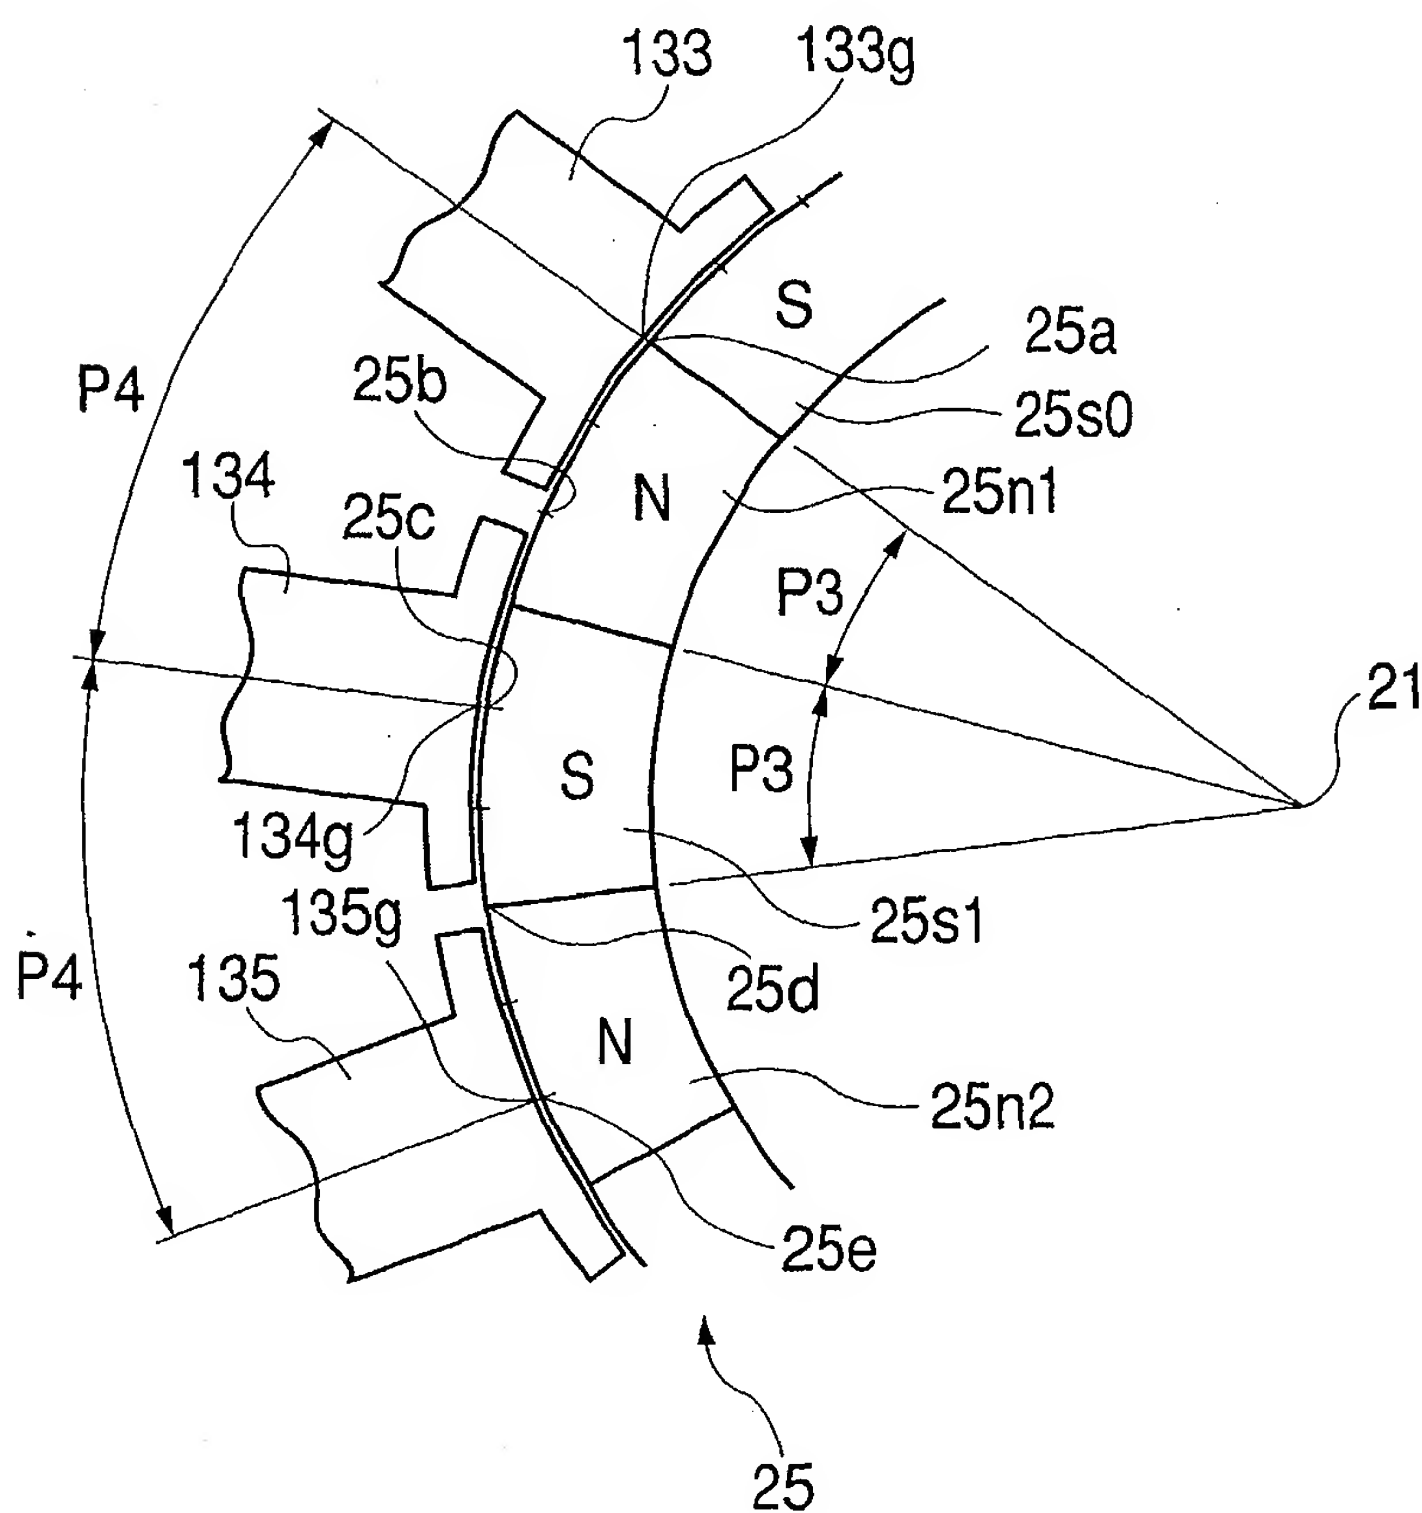




8 / 10

**FIG. 8**

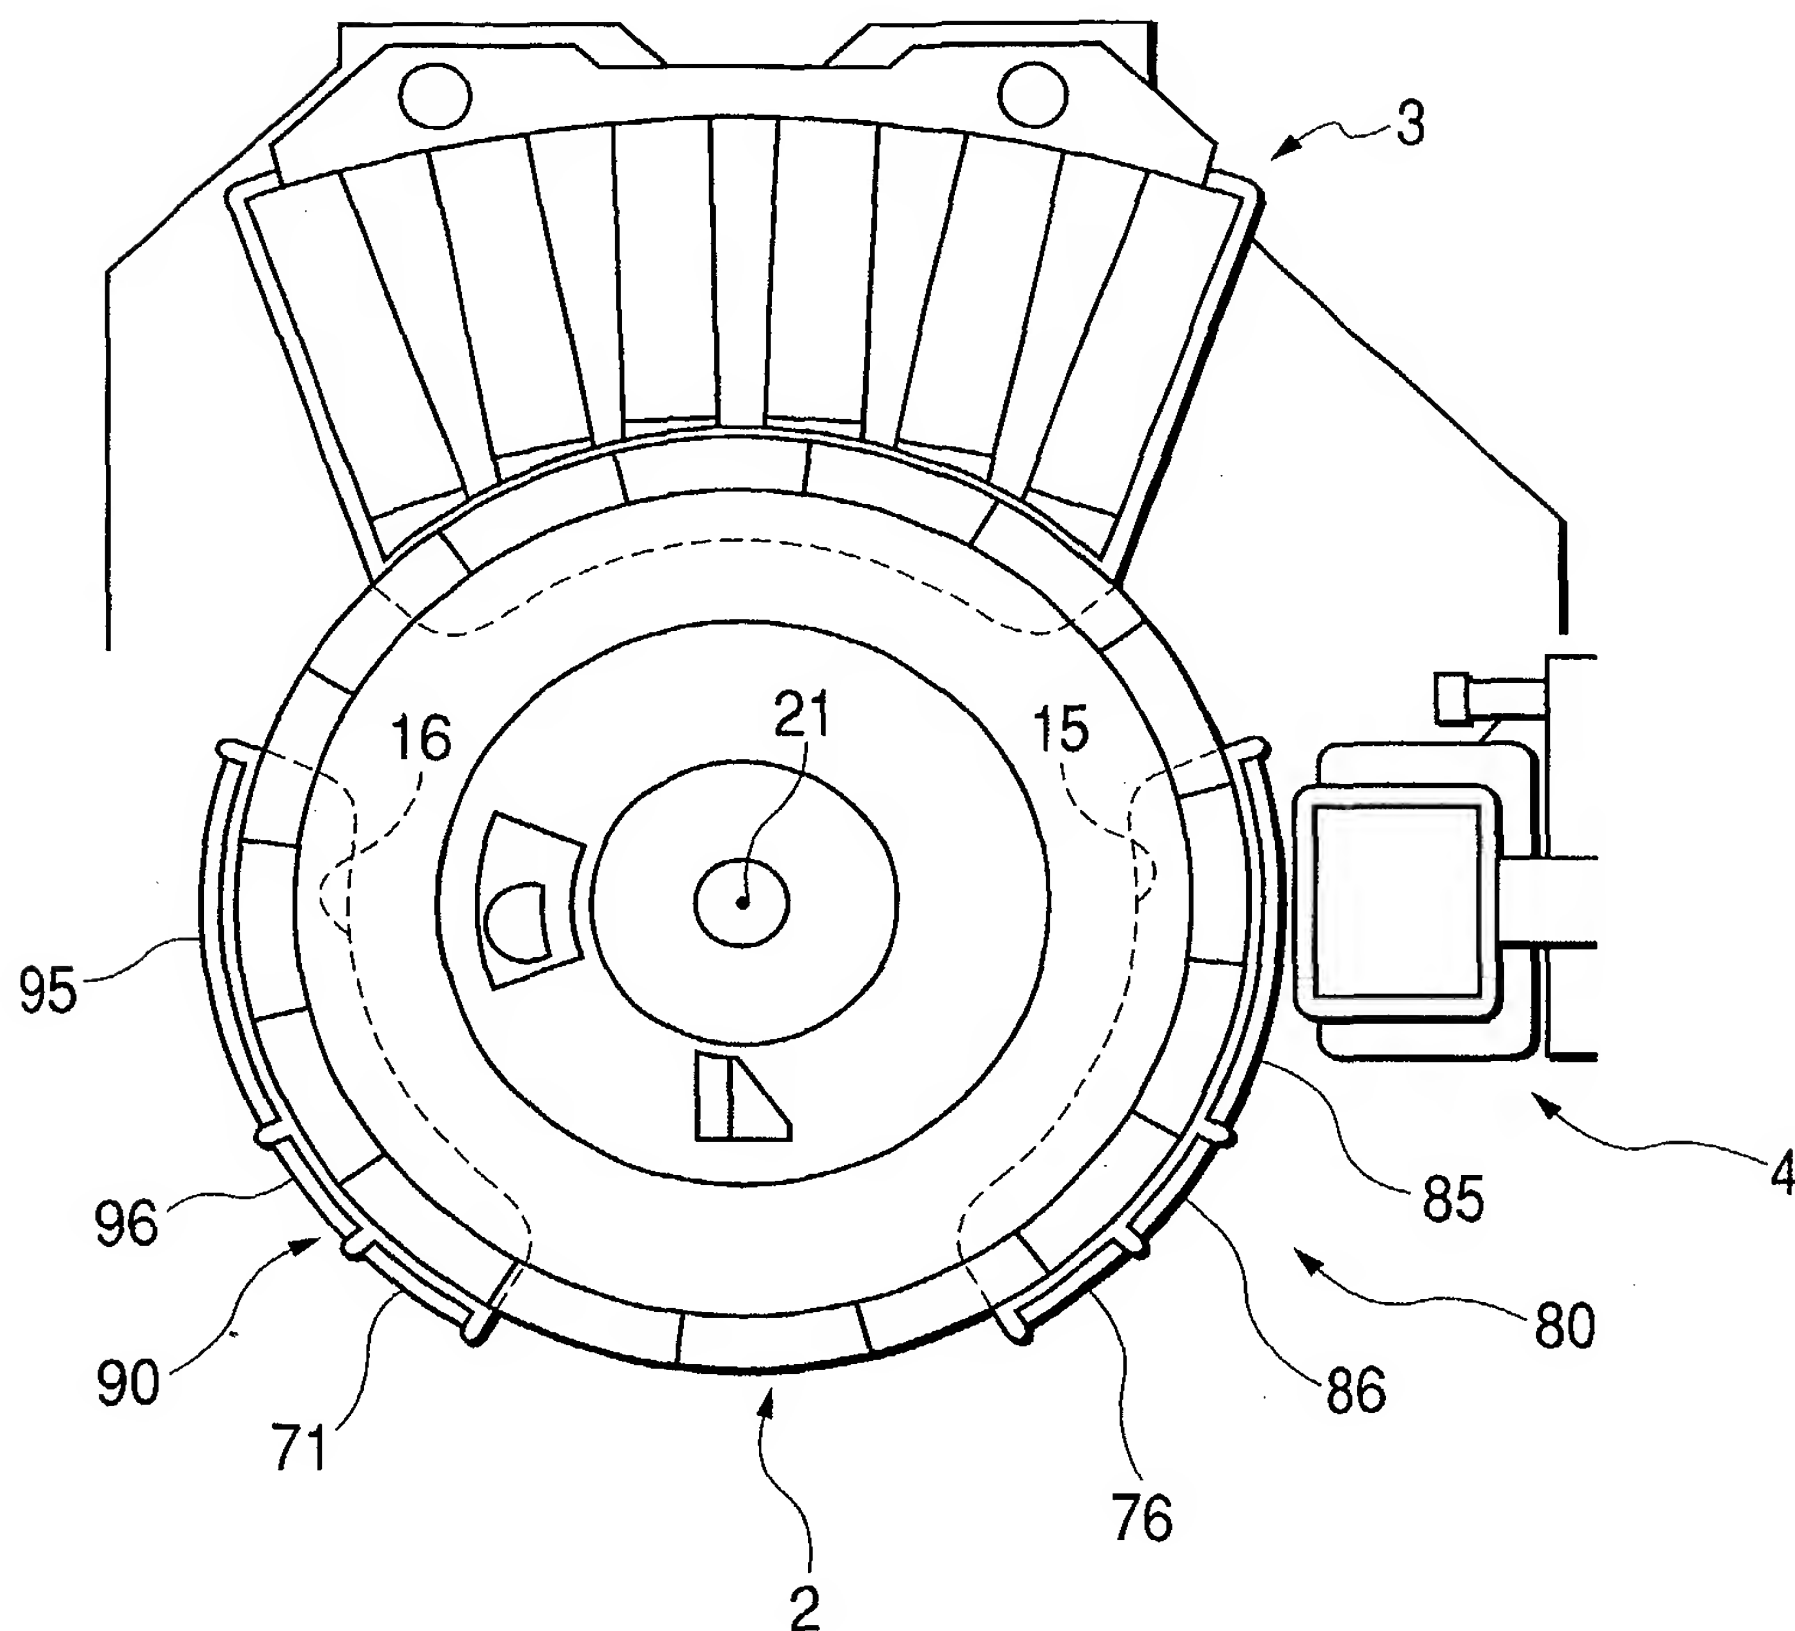

**FIG. 9**

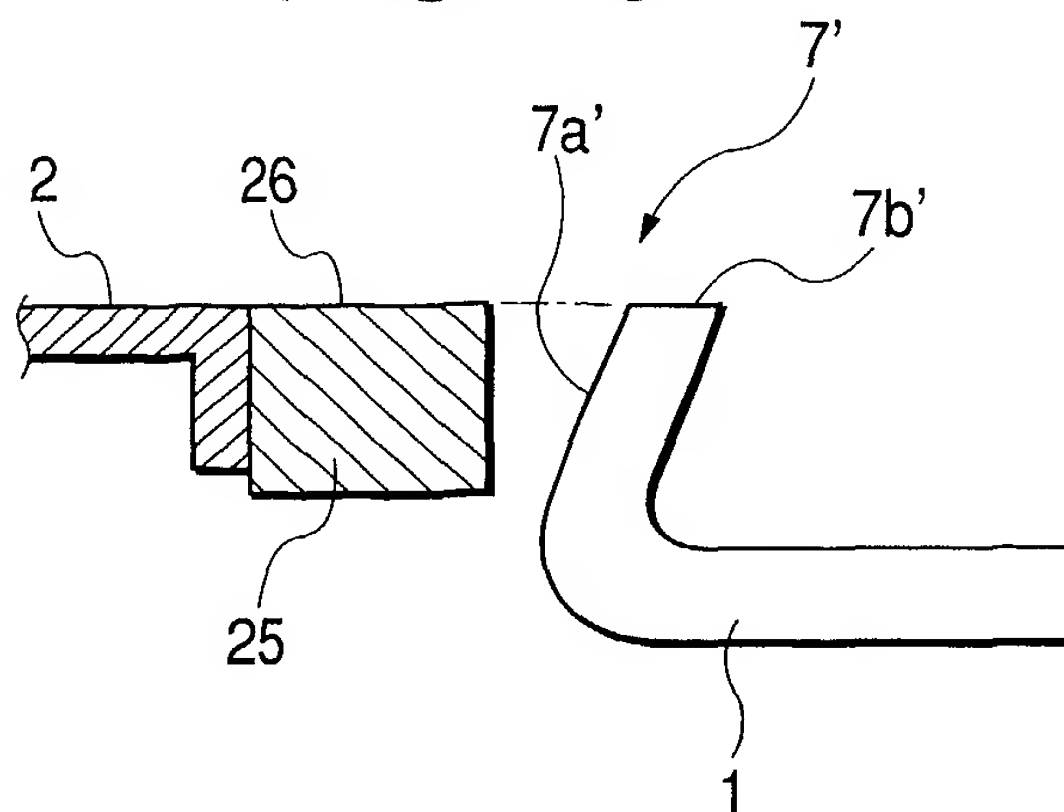



9 / 10

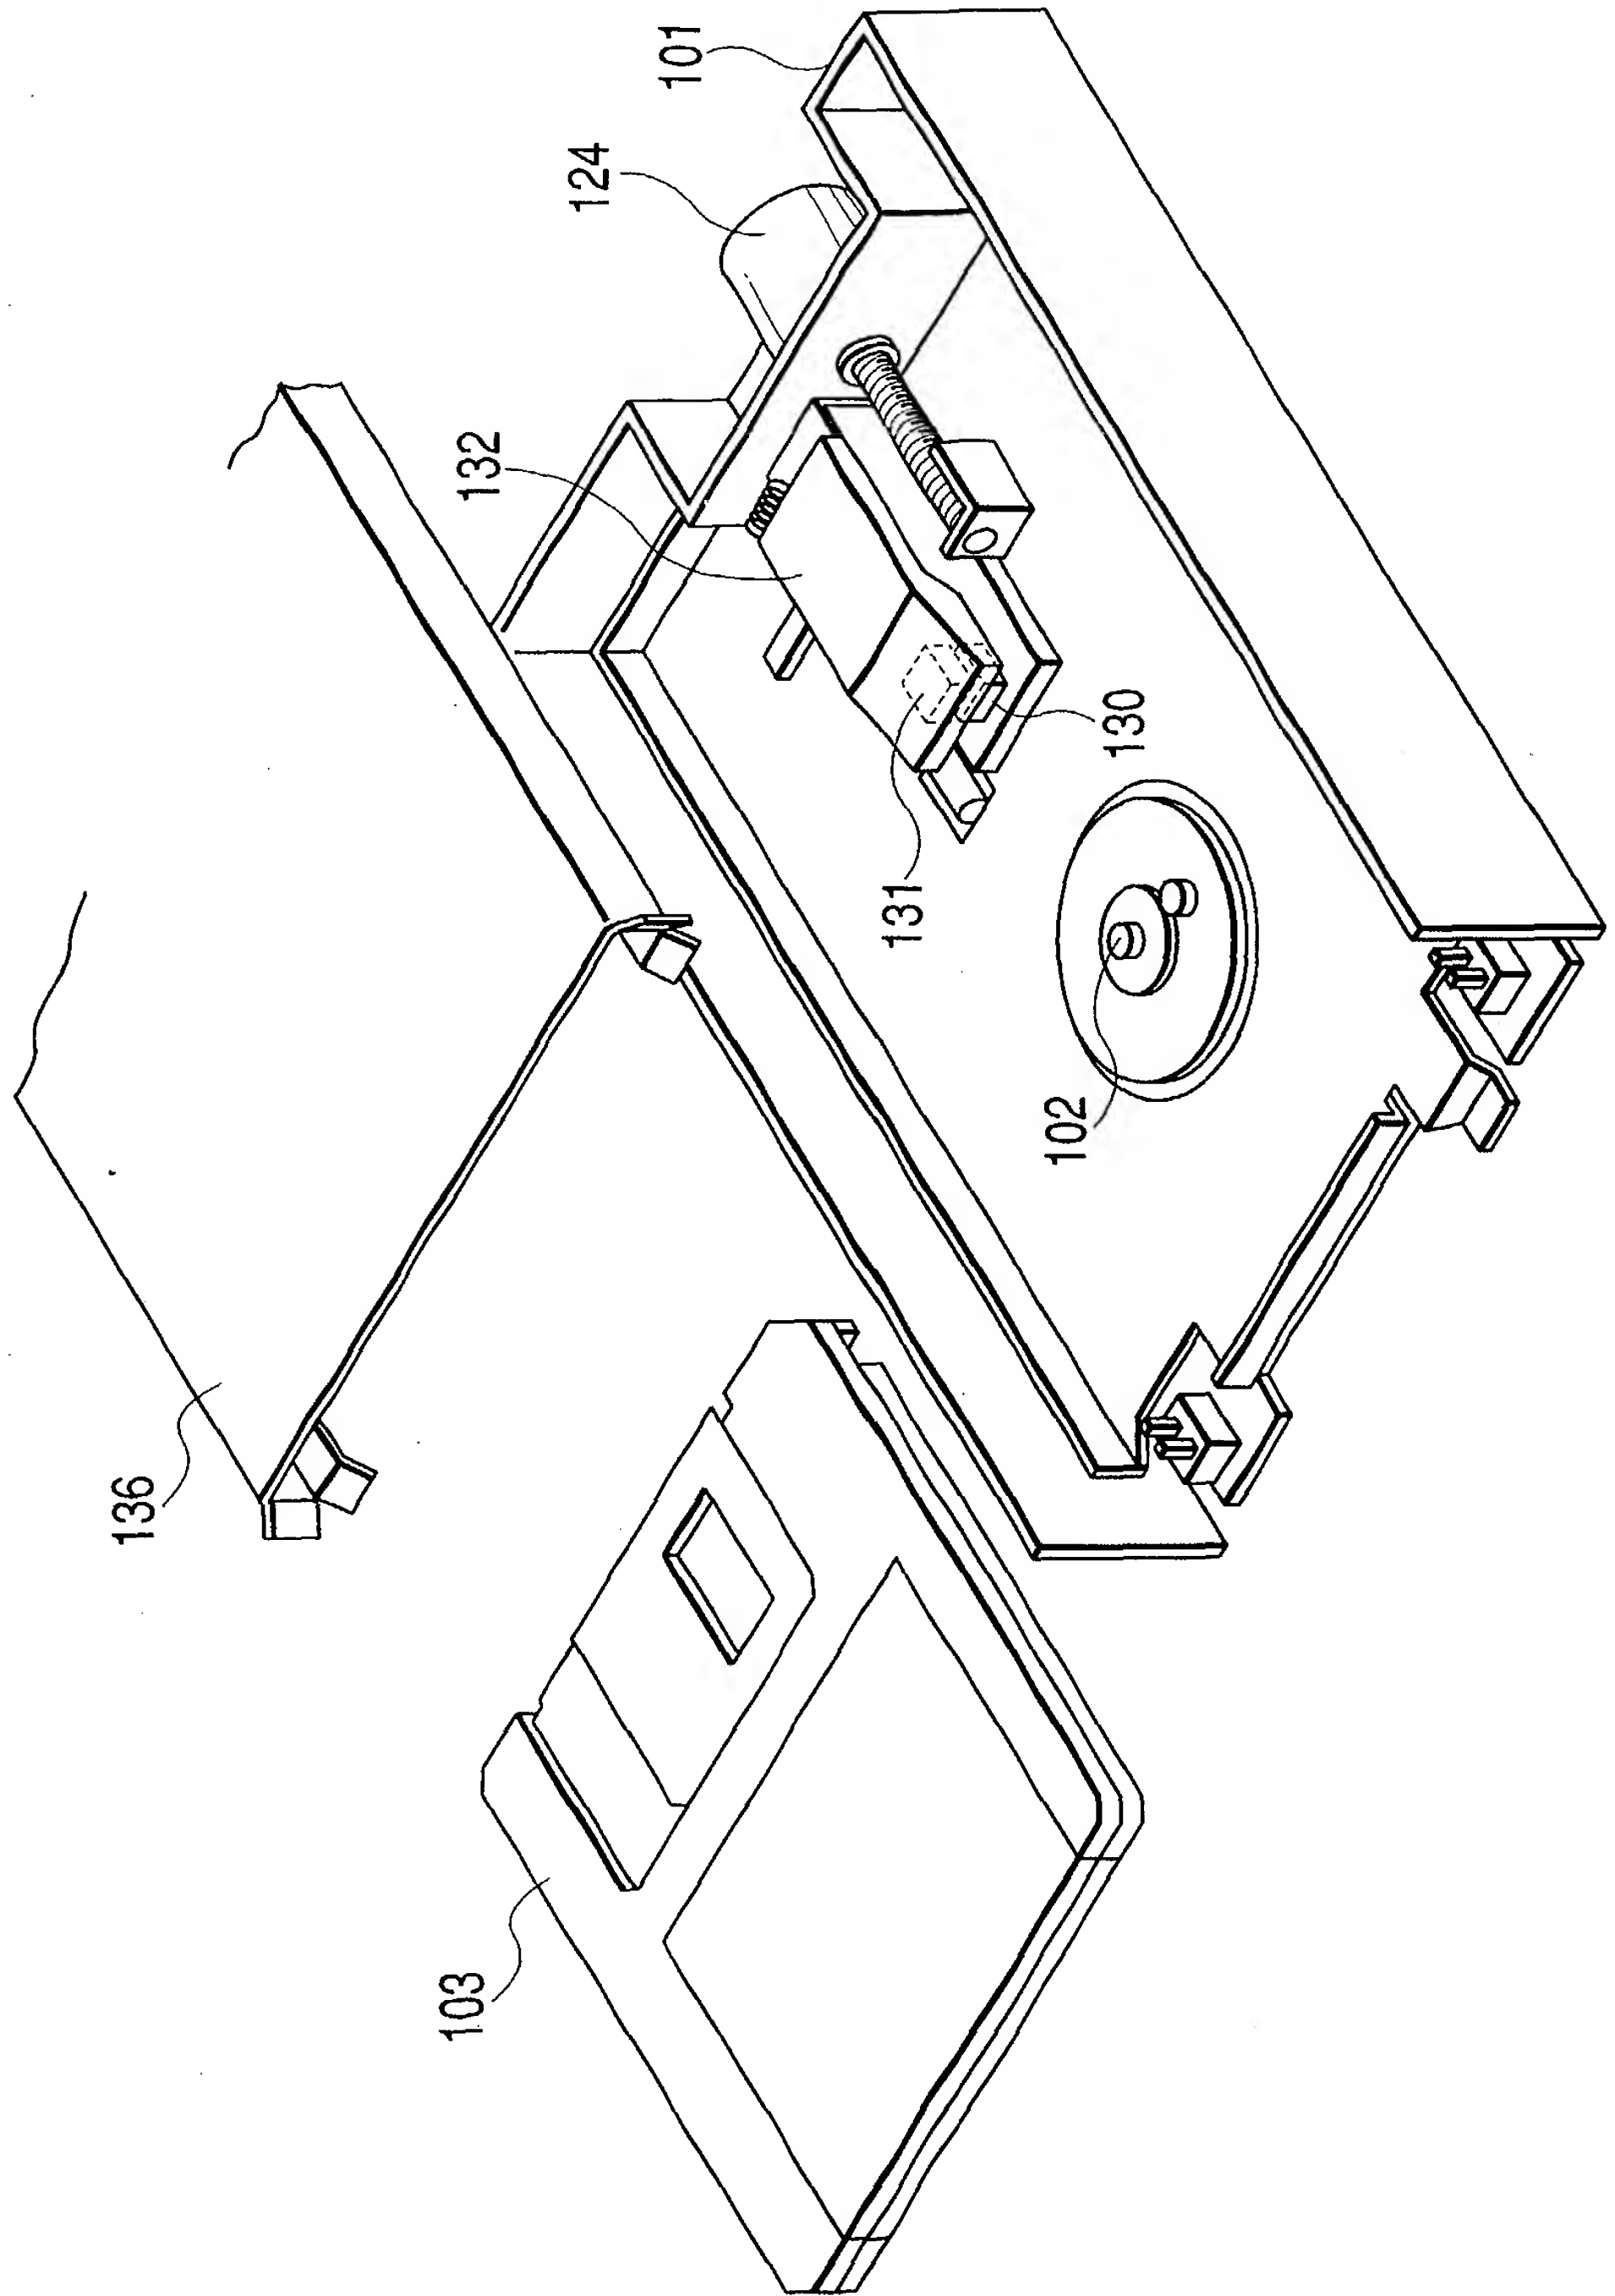


FIG. 10  
PRIOR ART

2025 RELEASE UNDER E.O. 14176

A cross-sectional view of a mechanical assembly. A central component 171 is shown with a dome-shaped top. It is surrounded by a housing or support structure. On the left, a component 161 is shown with a flange 162 and a shaft 163. A component 164 is also shown on the left. On the right, a component 165 is shown with a flange 162 and a shaft 163. A component 166 is shown on the right. A component 168 is shown at the bottom right. A component 170 is shown at the bottom left. A component 169 is shown at the bottom center.